

TXGC-WLK

The TXGC-WLK or Push Down Atomizer can be utilized for low pressure applications with a maximum of 1200 PSI at the insertion point with a burst pressure at 2400 PSI. TXAM's push down atomizer is available in multiple insertion lengths for various pipe sizes.

The TXGC-WLK can be easily added to any existing application that requires atomization with an available 1" FNPT to receive the 1" MNPT standard for the atomizer.



Specifications

Pump Application

Fluid Head

- Utilized with Single Injection Point
- 316 SS Body
- Various Injection Ranges (Per Tip)
- 3000 PSI Pressure Gauge

Body

- 316 SS
- Max Operating Pressure: 1200 PSI
- Burst Pressure: 2400 PSI

Connections

- Fluid Inlet: 3/8" Tube
- Insertion End: 1" Male NPT
- Insertion Lock: 10/32" Allen Head Set Screw

Bleeder Valve

- 316 SS, located on Insertion End (Stuffing Box)

Dimensions

- Total Length: 29.75"
- Optional Travel: 11", 19"

Power

Control Options

- Push Down
- Safety Chain
- Optional Travel
- Total Length

LOW Maintenance
NO Special Tool Required
NO Tubing Adjustments

Max Pressure: 1200 PSI/83 Bar

Fluid Atomization


* 316 Stainless Steel Assembly

* Multiple Insertion Lengths


* Relieves Trapped Air With Bleeder Valve

* Various Atomizer Tips Per Application

TXGC-WLK

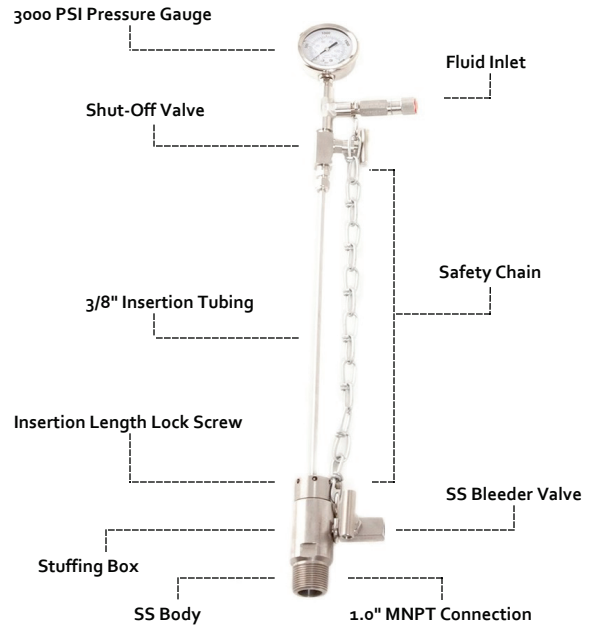

Dimensions

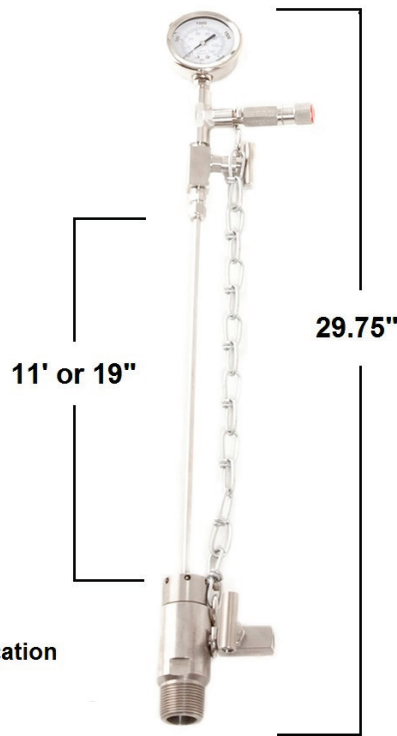

Tip Selection Per Application

