

TXCH-2S & 2L

The TXCH-2S & 2L or Coupon Holder can be utilized for low pressure applications with a maximum of 1000 PSI at the insertion point. TXAM's push down coupon holder is available in multiple insertion lengths for various pipe sizes.

The TXCH-2S & 2L can be easily added to any existing application that requires sampling with an available 1" FNPT to receive the 1" MNPT standard for the coupon holder.



Specifications

Pump Application

Fluid Head

- Utilized with Single Injection Point
- 316 SS Body
- Various Coupons Per Application
- User friendly Push Down Handle

Body

- 316 SS
- Max Operating Pressure: 1200 PSI
- Burst Pressure: 2400 PSI

Connections

- Handle: 1/4"
- Insertion End: 1" Male NPT
- Insertion Lock: 10/32" Allen Head Set Screw

Bleeder Valve

- 316 SS, located on Insertion End (Stuffing Box)

Dimensions

- Total Length: 19.00", 37.00"
- Optional Travel: 13", 31"

Power

Control Options

- Push Down Handle
- Safety Chain
- Optional Travel
- Total Length


LOW Maintenance
NO Special Tool Required
NO Tubing Adjustments

Max Pressure: 1000 PSI/69 Bar

Coupon Holder

- * 316 Stainless Steel Assembly
- * Multiple Insertion Lengths
- * Safety Chain & Stuffing Box
- * Various Coupons Per Application

TXCH-2S & 2L

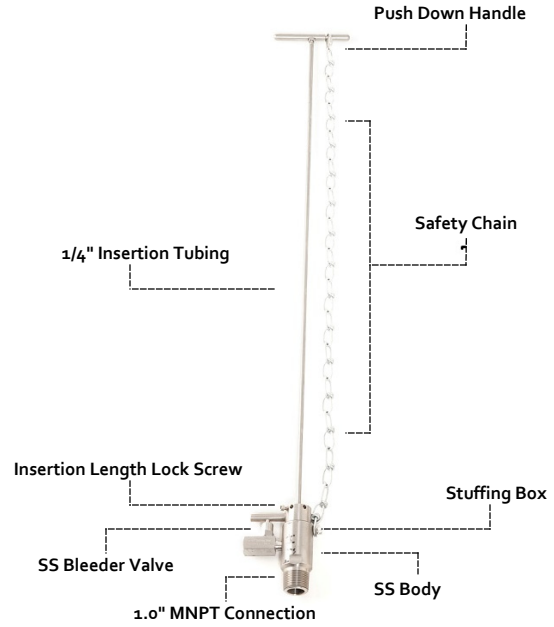

Dimensions

