

PTP5030

The PTP 5030 pneumatic pump is available in single head only. It utilizes a stroke adjustment bolt and pneumatic timer to precisely control your injection rates.

The PTP Series Pump is stainless steel construction for corrosion resistance. Stroke length adjustment can be easily made by turning the built-in stroke adjustment screw. The turn down ratio allows for extremely low to the highest achievable dosing. Recommended supply pressures range from 50 -150 PSI.



Specifications

Pump

Fluid Head

- Single
- Stainless Steel (Standard)

Plunger

- 1/2" @ 4500 PSI
- 60 GPD @ 50 Strokes per min

Supply

- Optimal Supply Pressure 50-100 PSI
- Supply Pressure Max: 150 PSI
- Supply Pressure Min: 20PSI
- Strokes Per Min: 2-70

Connections

- 1/2 Male NPT

Bleeder Valve

- 316SS, located on head

Power Option(s)

Pneumatic / Air / Gas

- Supplied / Compressed Air
- Natural / Raw Gas

Pump Controller

Control Options

- Pneumatic Timer
- Pneumatic Solenoid
- 4-20mA (Automated Injection Rate Change)


LOW Gas Emissions
LOW Cost of Ownership
FAST Return On Investment

Max Pressure: 4500 PSI/310 Bar

1.25 GPD to 60 GPD

- * Single head configuration
- * Pumps only one chemical at a set rate
- * Stainless Steel head assembly
- * Stainless Steel pump body
- * Single rate control via pneumatic timer
- * Non-adjustable three piece packing

PTP5030

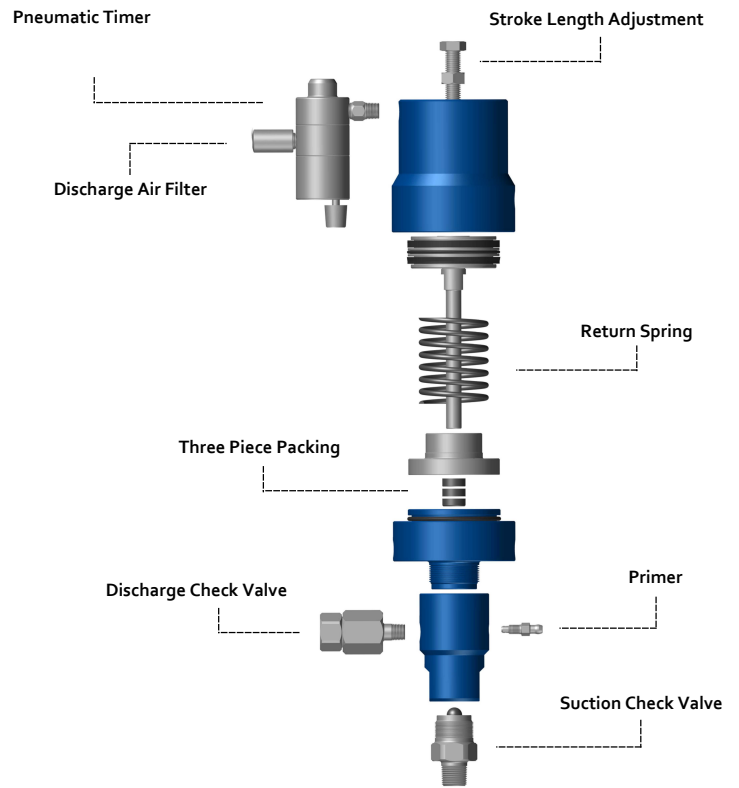

Dimensions

