

TX1/2-5000HP

The TX1/2-5000HP or TXCH-1/2, Atomizer/Coupon Holder can be utilized for high pressure applications with a maximum of 5000 PSI at the insertion point with a burst pressure at 7500 PSI. TXAM's atomizer/coupon holder is available in multiple insertion lengths for various pipe sizes.

The Multi-functional tool can be easily added to any application that requires atomization or a coupon and has an available 1/2" FNPT to receive the 1/2" MNPT standard for the atomizer.

Specifications

Pump Application

Fluid Head

- Utilized with Single Injection Point
- 316 SS Body (Cleanable Tip)
- Various Injection Ranges (Per Tip)
- 5000 PSI Pressure Gauge

Body

- 316 SS
- Max Operating Pressure: 5000 PSI
- Burst Pressure: 7500 PSI

Connections

- Fluid Inlet: 1/4" FNPT
- Insertion End: 1/2" Male NPT
- Insertion Lock: 1/2" Tube Nut

Bleeder Valve

- 316 SS, located on Insertion End (Stuffing Box)

Dimensions

- Total Length: Standard 46.5"
- Travel Length: Standard 16"
- Optional Travel Lengths: 6", 10", 24" 36"
(Effects total length proportionally. Custom sizes available upon request to be quoted.)

Power

Control Options

- Crank Down
- Safety Lock Nut
- Optional Travel
- Total Length

Coupon Holder TXCH-1/2



LOW Maintenance

NO Special Tool Required

NO Tubing Adjustments

Max Pressure: 5000 PSI/345 Bar

Fluid Atomization

* 316 Stainless Steel Assembly

* Multiple Insertion Lengths

* Relieves Trapped Air With Bleeder Valve


* Various Atomizer Tips Per Application

* 0.006 Tip @ 14 GPD
0.008 Tip @ 23 GPD
0.012 Tip @ 36 GPD
0.016 Tip @ 51 GPD
0.020 Tip @ 64 GPD

* Completely Removable/Cleanable Atomizer Tips

TX_{1/2}-5000HP

Coupon Holder TXCH-1/2

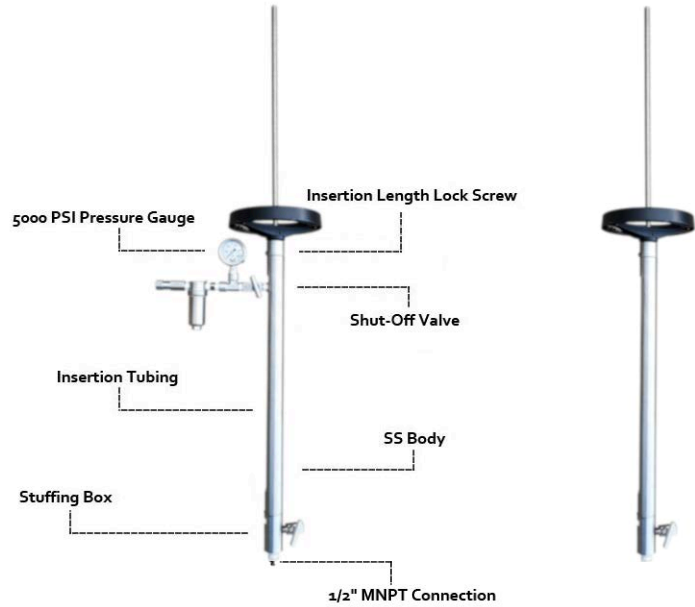

Dimensions

